




Eclisse SINGLE

Single Sliding Pocket Door system

Simple, functional, strong and reliable: this is the essential sliding pocket door that brought sliding doors into the 21st century and is widely used throughout the industry for both new build and refurbishments.

standard model for SOLID WALL

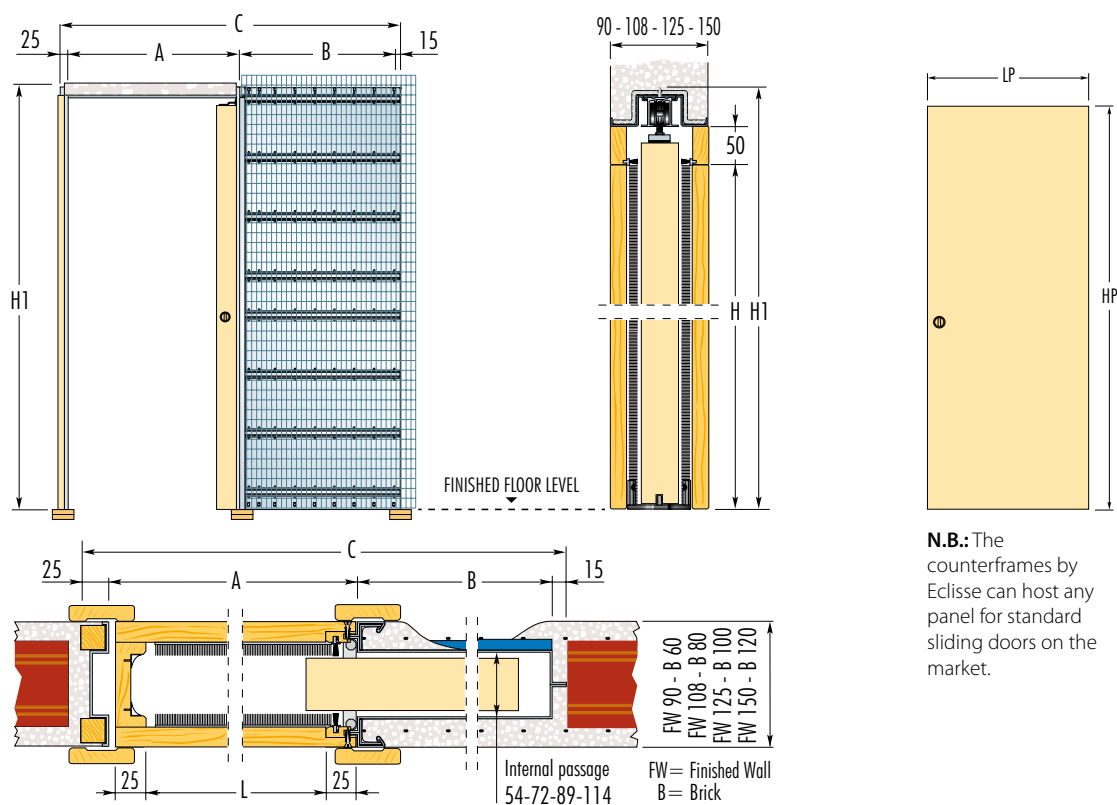

N.B.: The counterframes by Eclisse can host any panel for standard sliding doors on the market.

FRAMES FOR SINGLE DOORS - Measures related to Italian standards, other dimensions available

Standard model for SOLID WALL		DOOR PANEL		NOTES	
Max. Passage Size L x H	Overall Dimensions C x H1	A	B	LP	HP
600 x 2000/2100	1315 x 2090/2190	650	625	615 ÷ 635	2010/2110
650 x 2000/2100	1465 x 2090/2190	700	725		
700 x 2000/2100	1515 x 2090/2190	750	725	715 ÷ 735	2010/2110
750 x 2000/2100	1665 x 2090/2190	800	825		
800 x 2000/2100	1715 x 2090/2190	850	825	815 ÷ 835	2010/2110
850 x 2000/2100	1865 x 2090/2190	900	925		
900 x 2000/2100	1915 x 2090/2190	950	925	915 ÷ 935	2010/2110
950 x 2000/2100	2065 x 2090/2190	1000	1025		
1000 x 2000/2100	2115 x 2090/2190	1050	1025	1015 ÷ 1035	2010/2110

Non standard sizes:

- ▶ Passage width from 600 to 1200 mm
- ▶ Passage height from 500 to 2600 mm
- ▶ Frames manufactured in increments of 50 mm
- ▶ Frames with overall dimensions, passage sizes and internal dims different from the ones indicated on the table, can be realized on request

Warning

- ▶ When using pocket with internal dims of 54 mm max. door thickness is 40 mm (including any frames for glass door)
- ▶ Max door weight 80 kg (120 kg on request).

Dimensions are given in mm.