




Eclisse DOUBLE



Double Sliding Pocket Door system

The perfect way to open up two separate rooms in one easy movement changing intimate to open plan in a second. The double sliding door system gives you flexible space creating the ideal modern living requirements.

standard model for SOLID WALL

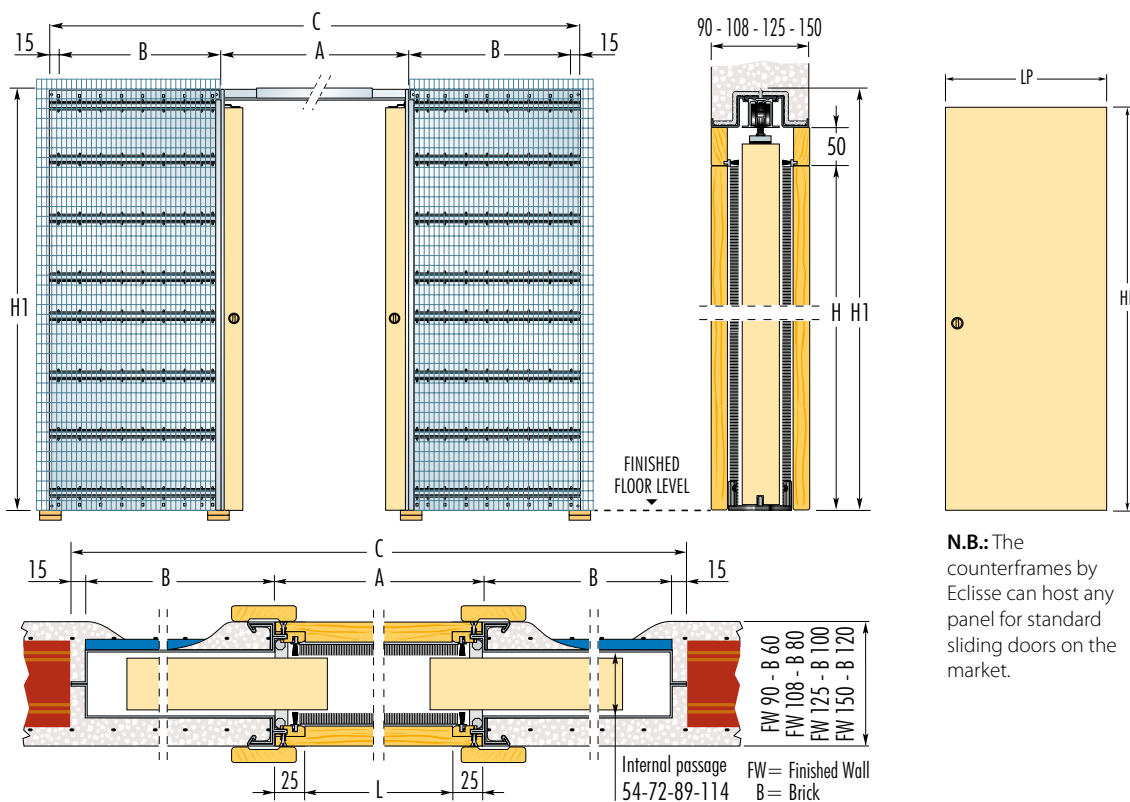

N.B.: The counterframes by Eclisse can host any panel for standard sliding doors on the market.

FRAMES FOR DOUBLE DOORS - Measures related to Italian standards, other dimensions available

Standard model for SOLID WALL		DOOR PANEL		NOTES	
Max. Passage Size L x H	Overall Dimensions C x H1	A	B	LP	HP
1200 x 2000/2100	2530 x 2090/2190	1250	625	615 ÷ 635	2010/2110
1300 x 2000/2100	2830 x 2090/2190	1350	725		
1400 x 2000/2100	2930 x 2090/2190	1450	725	715 ÷ 735	2010/2110
1500 x 2000/2100	3230 x 2090/2190	1550	825		
1600 x 2000/2100	3330 x 2090/2190	1650	825	815 ÷ 835	2010/2110
1700 x 2000/2100	3630 x 2090/2190	1750	925		
1800 x 2000/2100	3730 x 2090/2190	1850	925	915 ÷ 935	2010/2110
1900 x 2000/2100	4030 x 2090/2190	1950	1025		
2000 x 2000/2100	4130 x 2090/2190	2050	1025	1015 ÷ 1035	2010/2110

Non standard sizes:

- ▶ Passage width from 1200 to 2400 mm
- ▶ Passage height from 500 to 2600 mm
- ▶ Frames manufactured in increments of 50+50 mm (width) and 50 mm (height)
- ▶ Frames with overall dims, passage sizes and internal dims different from the ones indicated on the table, can be realized on request

Warning

- ▶ When using pocket with internal dims of 54 mm max. door thickness is 40 mm (including any frames for glass door)
- ▶ Max door weight 80 kg (120 kg on request).

Dimensions are given in mm.